



AENSI Journals

Journal of Applied Science and Agriculture

ISSN 1816-9112

Journal home page: www.aensiweb.com/jasa/index.html



Performance Improvement of Power System Stabilizer by Genetic Algorithm for One Machine Infinite Bus System

S. Ehsan Razavi, Mahdi Bahadorzadeh & A. Akbar Khazaei

Department of Electrical Engineering, Islamic Azad University, Mashhad Branch, Mashhad, Iran.

ARTICLE INFO

Article history:

Received 17 November 2013

Received in revised form 12

February 2014

Accepted 22 February 2014

Available online 25 March 2014

Keywords:

Genetic Algorithm

Optimum feedback controller

Power System Stabilizer

State feedback controller

ABSTRACT

Background: The power system stabilizers are added to the power system to enhance the damping of the electric power system. The design of PSS can be formulated as an optimal linear regulator control problem whose solution is a complete state control scheme. The implementation requires the design of state estimators that consume large time. **Objective:** Principle role of a Power System Stabilizer (PSS) is to increase damping of oscillations of generator rotor by control of its excitation by using of auxiliary stabilizer signals. The design of a PSS can be performed by suitable state and optimum feedback that roots of case study is transferred to suitable points as designed results. As the large searching techniques, Genetic Algorithms (GA) is global search techniques to provide a powerful tool for optimization problems by optimizing the mechanisms of natural selection and genetics. To fast accessing of desired results, this paper used a modified Genetic Algorithm for suitable designing of stabilizer. Finally, the advantages of the proposed method are illustrated by numerical simulation of the one machines-infinite-bus power systems. **Results:** While state feedback controller was used, so suitable system response was observed both inputs. In other word, state feedback controller has better performance than optimal controller for studied multi machine system. **Conclusion:** In this paper, a Genetic Algorithm method is used to design state and optimum feedback controllers for improvement PSS transient characteristics. The results for one-machine system is represented by Genetic Algorithm as simulation studies and compared with three control cases content open loop, optimum feedback controller and state feedback controller. However, the system is stabilized by optimum feedback controller but results illustrated undesired settling time and oscillations of final values as secondary input, slightly. As shown, state feedback controller lead to suitable operation of power system stabilizer for studied one-machine system and represented more proportional results than optimum feedback controller.

© 2014 AENSI Publisher All rights reserved.

To Cite This Article: S. Ehsan Razavi, Mahdi Bahadorzadeh & A. Akbar Khazaei., Performance Improvement of Power System Stabilizer by Genetic Algorithm for One Machine Infinite Bus System. *J. Appl. Sci. & Agric.*, 9(2): 418-424, 2014

INTRODUCTION

The power system stabilizers are added to the power system to enhance the damping of the electric power system. The design of PSS can be formulated as an optimal linear regulator control problem whose solution is a complete state control scheme. The implementation requires the design of state estimators that consume large time. To deal with problem, control scheme uses only some desired state variables such torque angle and speed. The desired objectives in this paper are:

- Variations of the angular frequency ($\Delta\omega$) can be achieved to end value equal to zero in minimum time.
- Variations of the torque angle ($\Delta\delta$) can be achieved to end value equal to minimum value in minimum time.

Different methods have been presented to achieve mentioned purposes. In (Chian-Chuang 2011) an optimal design for PSS has been proposed by grey prediction PID control method. However, output results related to second input wasn't considered. Also (Hui-Mei Wang, 2011.) was presented an adaptive back stepping method to improve of PSS performance.

For achieving desire objectives should be selected as minimum settling time, however peak value should be considered negligible. In this paper, authors propose a method to design of controller by modified genetic algorithm. Advantages of proposed method have been presented by numerical simulations for one machine

Corresponding Author: S. Ehsan Razavi, Department of Electrical Engineering, Islamic Azad University, Mashhad Branch, Mashhad, Iran.
E-mail: e_razavi_control@yahoo.com. Phone Number: +989124446816 & +98511-6641816

infinite bus system in MATLAB software. The proposed fitness function consists of three basic genetic operators: Reproduction, Crossover and Mutation. Moreover, elitism is used for retaining proportional chromosome.

Also in fitness function is implemented some cases such as maximum function value (max), the time of peak value (tp), settling time (ts) and end value of function to improve output characteristics.

This template, modified in MS Word 2003 and it is the official guide for authors of General Scientific Researches journal. Through this document, we will get into the right format of papers for publishing in SP. These guidelines include complete descriptions of the fonts, spacing, and related information for producing your manuscripts. All standard paper components have been specified for three reasons: (1) ease of use when formatting individual papers, (2) automatic compliance to electronic requirements that facilitate the concurrent or later production of electronic products, and (3) conformity of style throughout a journal paper. Margins, column widths, line spacing, and type styles are built-in; examples of the type styles are provided throughout this document and are identified in italic type, within parentheses, following the example. Please do not re-adjust these margins.. Some components, such as multi-leveled equations, graphics, and tables are not prescribed, although the various table text styles are provided. The formatter will need to create these components, incorporating the applicable criteria that follow.

Study System:

The system studied in this paper is shown in fig.1. It is a machine-infinite-bus power system. The system study is described by following state space representation:

$$\dot{x} = Ax + Bu \quad (1)$$

Where

$$x = [\Delta\delta \quad \Delta\omega \quad \Delta e'_q \quad \Delta e_{FD} \quad \Delta V_R \quad \Delta V_E]$$

Δ Denotes deviation from operation point

ω Rotor speed

δ Torque angle

e'_q Q axis component of voltage behind transient reactance

e_{FD} Stabilizing transformer voltage

V_R Regulator output voltage

V_E Exciter output voltage

u Supplementary control voltage

Where matrices A and B from (Chian-Chuang 2011), as follow:

$$A = \begin{bmatrix} 0 & 376.9 & 0 & 0 & 0 & 0 \\ -0.3055 & 0 & -0.299 & 0 & 0 & 0 \\ -0.3059 & 0 & -0.5517 & 0.1695 & 0 & 0 \\ 0 & 0 & 0 & 0.1789 & 1.0526 & 0 \\ -285.2 & 0 & -4205.6 & 0 & -20 & -8000 \\ 0 & 0 & 0 & 0.0045 & 0.0263 & -1 \end{bmatrix} \quad B = [0 \quad 0 \quad 0 \quad 0 \quad 8000 \quad 0]^T$$

$$C = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \end{bmatrix}$$

A block diagram of the study system is shown in Fig.1. This model has been extensively used and details can be found in (Chian-Chuang 2011).



Fig. 1: One Machine Infinite Bus System

Optimal Design:

In this paper, authors proposed a method to choice proportional routes for PSS and forecasting step value by genetic algorithm (GA) based on performance measures of the system's responses. The GA includes five fundamental parameters: (a) Population size, which influences amount of search points in every generation. The more population size in the GAS will increase the efficiency of searching, but it will time consuming; (b) Crossover probability, which influences the efficiency of exchanging information. The crossover probability is between 0.6 and 1; (c) Mutation probability, which occur with a small probability in the GAS. In general, the mutation probability is under 0.1. A large mutation probability in GAS will eliminate the result of reproduction and crossover, which let GAS become a random search; (d) Chromosome length, which influences the resolution of the searching result. The GAS with longer chromosome length will have the higher resolution, but it will increase the search space; (e) Generations, which influences the searching time and searching result. The GAS with larger search space and less population size, it needs more generations for a global optimum (Chian-Chuang 2011).

in order to improvement of control system and optimum system characteristic as settling time (t_s), peak time (t_p) and steady state value, fitness function determinate as follow:

$$f(i) = 10^6 \left(a_1 \times \max_1 + a_2 \times \max_2 + a_3 \times tp_1 + a_4 \times tp_2 + a_5 \times ts_1 + a_6 \times ts_2 + a_7 \times Fin_1 + a_8 \times Fin_2 \right) \quad (2)$$

Where a_i ($i = 1, 2, \dots, 8$) are assessable system performance factors that are known fine factors in GA. These factors have been choice based on weight and influence of parameters. Used Chromosomes used in GA have been determined as matrices in decimal system. Length of matrices arrays considered 4 cells. In addition elite selection in stages is performed to prevent of losing the desirable Chromosome. However reproduction number has been considered 100. For more searching in search space, a new Chromosome is added to next population from 90th iteration to up randomly. Population size influences amount of search point in every generation. The more population size in the GA will increase the efficiency of searching, but it will time consuming (Chian-Chuang 2011).

In this paper, authors provide a uniform method for mutation and crossover. In this method by using of metal slow cooling algorithm, application of mutation and crossover operators in GA algorithm decrease from 25 to 2 for 1st and last iteration respectively.

According to proposed fitness function, selected Chromosome will provide the controlled system with the desired performance of peak time, settling time and steady state.

Numerical Results:

System Eigen values in open loop case based given matrix A are shown in table 1.

Table 1: Eigen value of open loop system

Value	Parameter
-0.263 + j 10.82	λ_1
-0.263 - j 10.82	λ_2
-8.169 + j 8.951	λ_3
-8.169 - j 8.951	λ_4
-2.885	λ_5
-1.624	λ_6

Optimal Controller:

In order to design an optimal feedback to transfer initial case of system to final case with consideration of an operational indexes, optimal controller have been used. However operational indexes were chosen to provide best balance between control system cost and performance (Ravinda, 2012).

As known, optimal controller design is aimed based on optimal factor K, where:

$$u(t) = -Kx(t) \quad (3)$$

$$K = R^{-1} B^T p \quad (4)$$

$$pA + A^T p + Q - pBR^{-1}B^T p = 0 \quad (5)$$

Equation (4) is riccati equation that comprises desired matrices R and Q (commonly positive diagonal matrix). By solving this equation, matrix P is obtained that lead to gains of optimal control feedback is resulted from equation (3).

Desirable values of optimal controller can be obtained by large iteration (F. Fernandez 2011, T. Sezi at al., 2009). To deal with this problem, a modified Genetic Algorithm has been proposed by authors. First optimal feedback values were designed by creating initial population size with 30 Chromosome. Matrix AQ was determinate as follow:

$$A_Q = A - B * K \quad (6)$$

With notification to system considerations comprising settling time (ts), peak time (tp) and peak value, fitness of Chromosome was analyzed. Also, new populations have been created by reproduction, crossover and mutation operators for every step of generation. Matrices R and Q was resulted as follow:

$$Q = \begin{bmatrix} 0.9590 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0.6212 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0.5531 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0.1019 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0.6219 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1.9870 \end{bmatrix} \quad R = [65.5417]$$

By running LQR2 command in MATLAB software, optimal K is resulted as follow:

$$K = [-0.0340 \quad -0.1892 \quad -0.1594 \quad 0.1186 \quad 0.0951 \quad -0.6726]$$

State Feedback Controller:

To determinate state feedback values, dominant poles was designed with desired ζ , then, ω would chose because desired pole should be located near the zero ($0 < \omega < 5$). Table 2 show desirable routs (dominant poles).

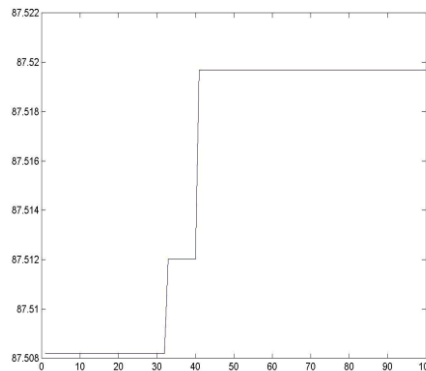


Fig. 2: Optimization process of GA in case study

For analysis the state feedback controller, controllability of system should be investigate. As notice to the controllability of system, by programming in MATLAB software, state feedback values were resulted. The maximum number of generations to be run by the GA is 100. Figure 2 shows the optimization process of GA in case study.

Table 2: Transferred roots to design of state feedback controller


Desired roots
$-20.4206 \pm j 19.2885$
$-19.0299 \pm j 13.9028$
$-15.9404 \pm j 13.5485$

Simulation Results:

System response to step input are shown in fig.3 for open loop case. Results show instability of system in normal operation. Table 3 show studied parameters in the simulation.


Table 3: Studied parameters (output) in simulations

Parameter	Output
$\Delta\delta$	Out(1)
$\Delta\omega$	Out(2)

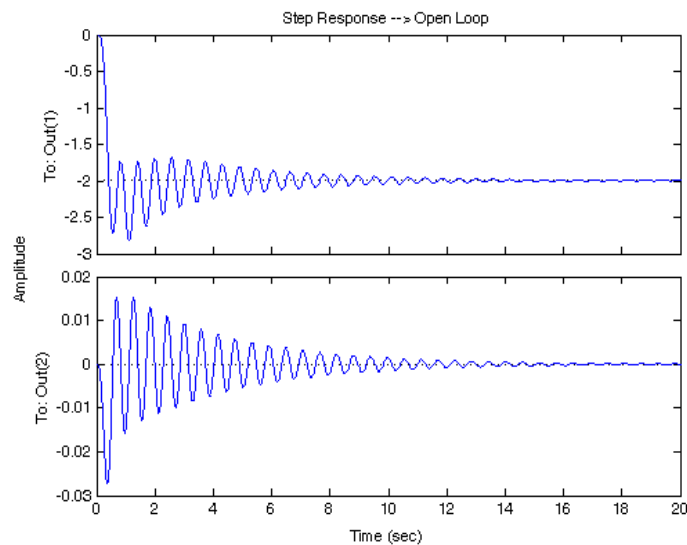**Fig. 3:** Output responses to step input for open loop case

Settling time and final value have not been desired for second input when optimum controller was used to improvement transient characteristic of stabilizer. However system stability has been improved considerably.

Fig.4 and fig.5 show simulation results to step input for optimal controller and state feedback controller respectively.

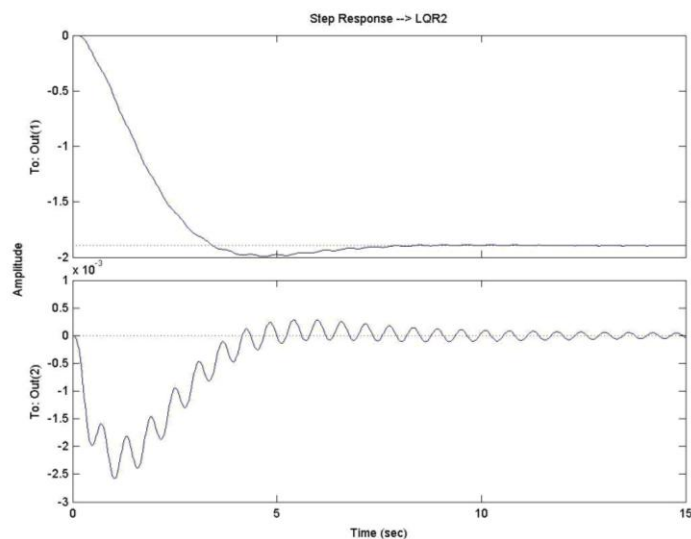**Fig. 4:** Output responses to step input with optimal controllers

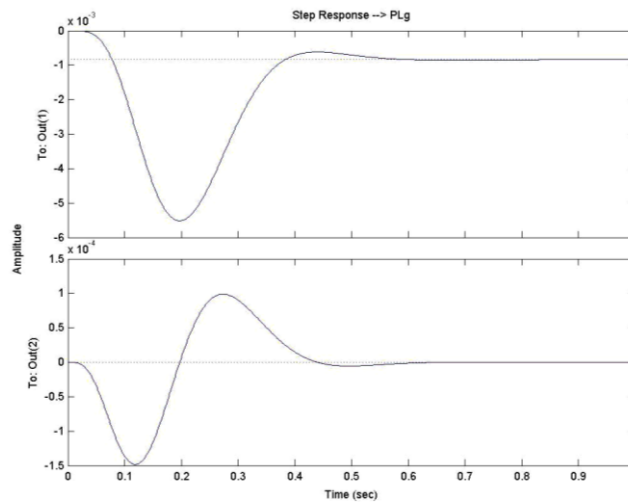


Fig. 5: Output responses to step input with state feedback controller

While state feedback controller was used, so suitable system response was observed both inputs. In other word, state feedback controller has better performance than optimal controller for studied multi machine system.

Conclusion:

In this paper, a Genetic Algorithm method is used to design state and optimum feedback controllers for improvement PSS transient characteristics. The results for one-machine system is represented by Genetic Algorithm as simulation studies and compared with three control cases content open loop, optimum feedback controller and state feedback controller.

However, the system is stabilized by optimum feedback controller but results illustrated undesired settling time and oscillations of final values as secondary input, slightly. As shown, state feedback controller lead to suitable operation of power system stabilizer for studied one-machine system and represented more proportional results than optimum feedback controller.

REFERENCE

- Anderson, P.M. and A.A. Fouad, 1977. "Power system control and stability" Ames, Iowa:Iowa state university press.
- Cheng, B., 1986, "The grey control on industrial process; Journal of huangshi college, 1: 11-23.
- Chian-Chuang Ding, King-Tan Lee, Chee-Ming Tsai, 2011. Tsong-Liang Huang. IEEE. "Optimal Design for Power System Dynamic Stabilizer by Grey Prediction PID Control ",
- Daniel, W., 2011. Durbak, IEEE, "Surge Arrester Modeling".
- Daniel, W., Durbak, 1983. "Zinc-oxide Arrester Model for Fast Surges".
- Data taken from the PSCAD(EMTDC), 2013. default Surge Arrester, ASEA XAP-A, PSCAD ruling book, page 241, PSCAD, Version 4.0.
- Deng, J.L., 1989. "Introduction to grey system theory," The Journal of grey system, I(1): 1-24.
- Diaz, R. & F. Fernandez & J. Silva, IPST, 2011."Simulation and Test on Surge Arrester in High-Voltage Laboratory".
- Dr. Ahmad Zahedi, 1994. "Effect of Dry Band on Performance of UHV Surge Arrester and Leakage Current Monitoring Using New Developed Model".
- Fernandez, F. & R. Diaz, IPST 2011, "Metal-Oxide Surge Arrester Model for Fast transient Simulations".
- Gupta, T.K., 1990. "Application of Zinc Oxide Varistors", American Ceramic Journal of society, 73: 1817-1840.
- Hui-Mei Wang, Tsong-Liang Huang, Chi-Ming Tsai, Che-Wei Liu. IEEE, 2011. "Power System Stabilizer Design Using Adaptive Backstepping Controller".
- IEEE Standard, C62.11 & IEC Standard, 60099-4.
- IEEE Working Group 3.4.11, "Modeling of Metal Oxide Surge Arresters", IEEE. 1992.
- Ikmo Kim, Toshihisa Funabashi, Haruo Sasaki, Toyohisa Hagiwara, Misao Kobayashi, 1996. "Study of ZnO Arrester Model for Steep Front Page", IEEE Transactions on Power Delivery, 11: 2.
- Li, H.J. & S. Birlasekaran & S.S. Choi, 2012. "A Parameter Identification Technique for Metal-Oxide Surge Arrester Models".

Meshkatoddini, M.R. & Buiai & A. Loubiere, 1993. "Study of the Influence of the Position of ZnO Surge-Protective Devices on their Performance in a Distribution Network", PSC .

Moucoud, H.A., J.L. Deng, 1982. "Control problems of grey system," System & Control Letters, 1(5): 288-294.

penchenat, G., 1992."Conaribution a' l'e'tude de dispositifs de protection", Engineering project, Poul Sabatier University, Toulouse, France.

Pinceti, P. & M. Giannettoni, 1999. "A simplified model for zinc oxide surge arresters", IEEE Transactions on Power Delivery, 14: 2.

Popov, M. & L. Van der Sluis & G.C. Poap, 2012. "Application of a New Surge Arrester Model in Protection Studies Concerning Switching Surges".

Ravinda, P., Singh & T.V.P. Singh, 2012. "Influence of Pollution on the Performance of Metal Oxide Surge Arresters ".

Sezi, T. at al., 2009. "Field Experience Summary with a Line Differential Relay Using Complex Communication Infrastructure," Siemens Energy, Inc., Nuremberg, Germany, Sep.

Wong, C.C. and S.Y. Chang, 1998. "Parameter Selection in the Sliding Mode Control Design using Genetic Algorithms" TanKang Journal of Science and Engineering, 1(2): 115-112.

Wong, C.C., W.C. Liang, H.M. Feng and D.A. Chiang, 1998. "Grey prediction controller design," The Journal of gey system, 10(2): 132-131.

Zhou, Y.S. and L.Y. Lai, 2010."Optimal Design of Fuzzy Controllers by Genetic Algorithms" IEEE Trans. on industry applications, 36: 1.